



Premium Connection
TP-FJ



- TP-CQ^{Series} Premium Connection
- TP-G2^{Series} Premium Connection
- TP-NF Premium Connection
- TP-FJ Premium Connection
- TP-BM Semi-Premium
- TP-QR Semi-Premium
- TP-TS Semi-Premium
- TP-JC Semi-Premium



Tianjin Pipe (Group) Corporation
Tianjin Pipe International Economic & Trading Corporation
Add.: No.396, Jintang Road, Dongli District, Tianjin, P.R. China
Tel.: +86 22 6628 0988
Fax: +86 22 6628 0681
P.C.: 300301
www.tpcointernational.com

TP-FJ | 5"~10-3/4"

- OD and ID are 100% Flush
- Maximum clearance
- Designed for medium or heavy wall casing

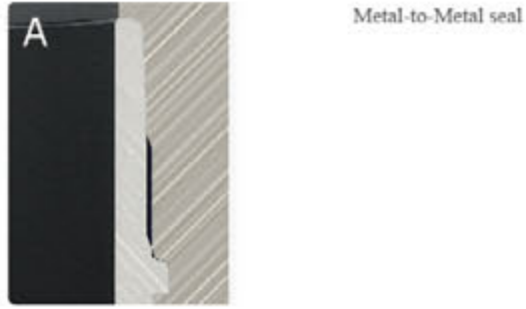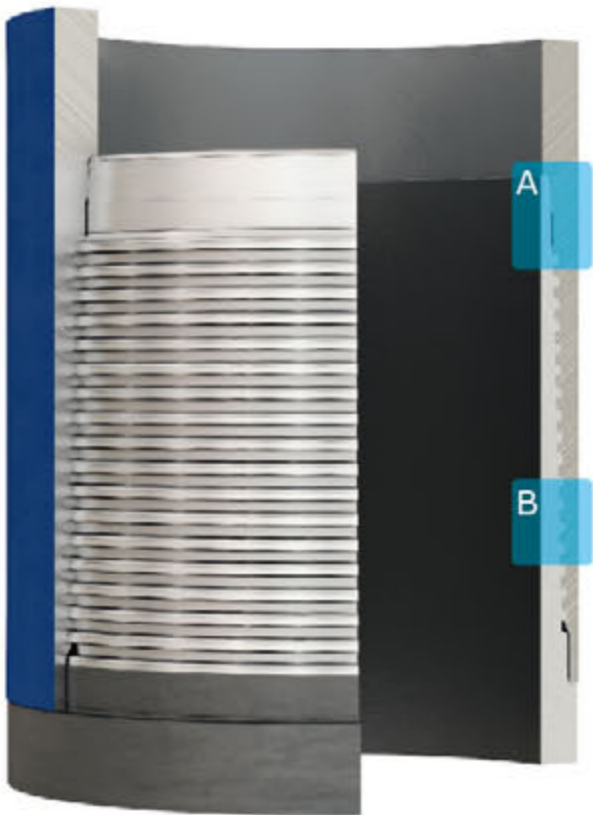

Metal-to-Metal seal



API Buttress thread
Lead=5TPI
Taper=1:16

Description

Threaded Connection

Buttress threads form with a taper of 1:16 and a lead of 5TPI, which can be measured by API gauge, more applicable for medium or heavy wall pipes. Pipe to pipe are connected without coupling.

Metal-to-Metal Seal

Metal-to-Metal seal surface provides enough contact length and contact pressure. The Metal-to-Metal seal system offers excellent gas-tight sealing, even under the most severe combined loads. The seal integrity remains constant after repeated make-ups and break-outs. Optimized thread geometry minimizes the risk of galling, even when thread compounds are poorly applied.

Torque Shoulder

A reverse angle torque shoulder provides accurate power-tight make-up, which also enhances Metal-to-Metal sealing.

Internal Profile

The OD and ID are 100% flush, which gives the maximum clearance.

Low Stress Design

The lower stress design makes the connections reliable in corrosive conditions.

